


Hotel Hardware Access Reader

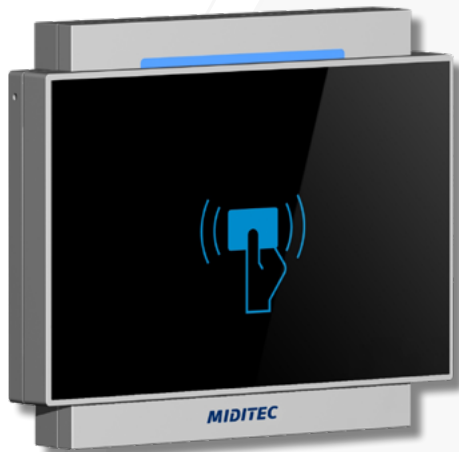

HR605 SKYLINE MILOCK ACCESS READER FOR OUTDOOR USE

Online offline reader with contactless MIFARE reader. The reader is part of the Skyline series and is supplied in a silver-coloured casing with a black control panel. The LED light bar displays the authorisation status of the read card.

The HR605 can be used outdoors

▼ ACCESS READER


MH5302 HR605 Skyline access reader, MIFARE Classic, surface-mounted for outdoor use

▼ ACCESSORIES AND OPTIONS

MH8772 Built-in power supply unit 24 W

MH8773 Built-in power supply unit 54 W

Dimensions

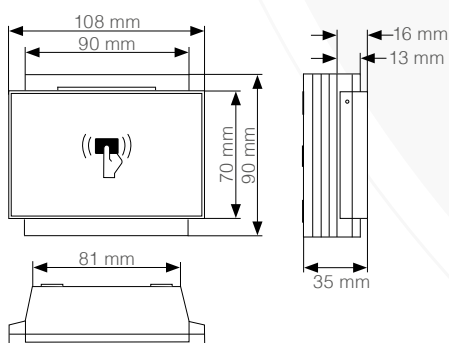

Surface-mounted

► FEATURES

- Contactless reader technology
- Online operation (option) with HAC7000/32 Control Unit
- Optical status display via multicolour LED light bar
- Acoustic feedback via signal transmitter
- Permanent door release
- RS485 interface (2-wire) for connection to the control unit
- 2 parameterisable inputs
- 2 parameterisable outputs (make contacts) (e.g. for door strike)
- Power supply via external power supply unit for reader and door strike
- Reading range up to 5 cm

TECHNICAL DATA

Voltage supply	12 to 24 V DC external
Max. power input	1.3 W
Max. power consumption	100 mA at 12 V DC
Ambient temperature	-10 °C - +45 °C
IP protection class	67
Dimensions (H x W x D)	90 x 108 x 35 mm
Interface	RS485
Reader technology	MIFARE Classic
Mounting	Surface-mounted

Installation example

