

Hotel Hardware

Access Reader for Room Controller



HRC600 SKYLINE MILOCK ACCESS READER FLUSH- / SURFACE MOUNTED

Online offline reader with contactless MIFARE reader. The reader is part of the Skyline series and is supplied in a silver-coloured casing with a black control panel. The LED light bar displays the authorisation status of the read card as well as the room status DND (Do not disturb) or MUR (Make-up room).
Note: The access reader is operated together with an HDC15-V3 Room Controller.

▼ ACCESS READER

MH8732 HRC600 Skyline access reader, MIFARE Classic, surface-mounted

MH8737 HRC600 Skyline access reader, MIFARE Classic, flush-mounted


▼ ACCESSORIES AND OPTIONS

MH9200 HDC15-V3 Raum Controller

MH8772 Built-in power supply unit 24 W

MH8773 Built-in power supply unit 54 W

Dimensions

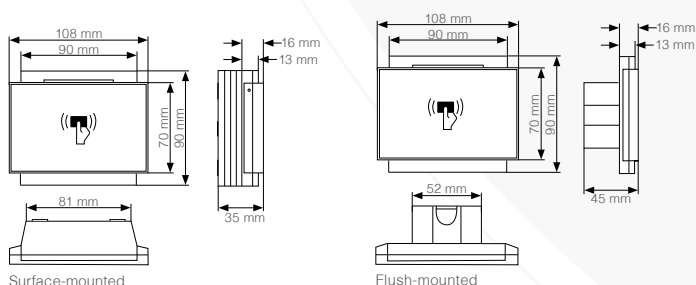

► FEATURES

- Contactless reader technology
- Online operation (option) with HAC7000/32 Control Unit
- Optical status display via multicolour LED light bar
- Acoustic feedback via signal transmitter
- Display of DND and MUR via LED light bar
- Permanent door release (not for guest room doors)
- RS485 interface (2-wire) for connection to the room controller
- Power supply via external power supply unit for reader, room controller and door strike
- Reading range up to 5 cm

TECHNICAL DATA

Voltage supply	12 to 24 V DC external
Max. power input	1.3 W
Max. power consumption	100 mA at 12 V DC
Ambient temperature	0 °C - 45 °C
IP protection class	53
Dimensions FM (H x W x D)	90 x 108 x 45 mm
Dimensions SM (H x W x D)	90 x 108 x 35 mm
Interface	RS485
Reader technology	MIFARE Classic
Mounting	Surface- or flush-mounted

Installation example

