

Hotel Hardware

Access Reader for Room Controller



HRC605 SKYLINE MILOCK ACCESS READER FOR OUTDOOR USE

Online offline reader with contactless MIFARE reader. The reader is part of the Skyline series and is supplied in a silver-coloured casing with a black control panel. The LED light bar displays the authorisation status of the read card.

The HRC605 can be used outdoors

Note: The access reader is operated together with an HDC15-V3 Room Controller.


▼ HRC605

MH9119 HRC605 Skyline access reader, MIFARE Classic, surface-mounted, for outdoor use

▼ ACCESSORIES AND OPTIONS

MH9200 HDC15-V3 Room Controller
 MH8772 Built-in power supply unit 24 W
 MH8773 Built-in power supply unit 54 W

Dimensions

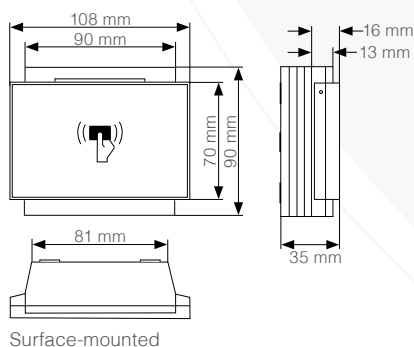

► FEATURES

- Contactless reader technology
- Online operation (option) with HAC7000/32 Control Unit
- Optical status display via multicolour LED light bar
- Acoustic feedback via signal transmitter
- Permanent door release
- RS485 interface (2-wire) for connection to the room controller
- Power supply via external power supply unit for reader, room controller and door strike
- Reading range up to 5 cm

TECHNICAL DATA

Voltage supply	12 to 24 V DC external
Max. power input	1.3 W
Max. power consumption	100 mA at 12 V DC
Ambient temperature	-10 °C - +45 °C
IP protection class	67
Dimensions (H x W x D)	90 x 108 x 35 mm
Interface	RS485
Reader technology	MIFARE Classic
Mounting	Surface-mounted

Installation example

