

Hardware

Reader for SCU7000/x Universal Control Unit



M615C ACCESS READER WITH PIN CODE FOR OUTDOOR SURFACE-MOUNTED

PIN code access reader with contactless MIFARE/LEGIC reader. The reader has an RS485 interface for connection to an SDC15-V3 Door Controller. The reader is part of the Skyline series and is supplied in a silver-coloured casing with a black control panel. The LED light bar displays the authorisation status of the read card.

Note: The reader is operated together with an SDC15-V3 Door Controller.

▼ M615C FOR OUTDOOR

MH9766 M615C, MIFARE Classic / DESFire, surface-mounted

MH9767 M615C, LEGIC prime / advant, surface-mounted

▼ ACCESSORIES AND OPTIONS

MH9222 SDC15-V3 Door Controller

MH8772 Built-in power supply 24 W

MB5384 Decentralised authorisation assignment per reader


► FEATURES

- Contactless reader technology
- Online operation with SCU7000/x Universal Control Unit and SDC15-V3 Door Controller
- Optical status display via multicolour LED light bar
- Acoustic feedback via signal transmitter
- Power supply via external power supply for reader, door controller and door strike
- Keypad with 16 capacitive, blue-illuminated digits and function keys
- Pin code entry
- Arming/disarming of a hazard detection system
- Integrated sabotage contact for connection to universal control unit
- Reading range up to 5 cm

TECHNICAL DATA

Voltage supply	12 V DC external
Max. power input	1,3 W
Max. power consumption	100 mA at 12 V DC
Ambient temperature	-5 to +45 °C
IP protection class	67
Interface	RS485 / 2-wire
Dimensions (H x W x D)	90 x 108 x 35 mm
Casing colour	silver (RAL 9006)
Material	plastic
Weight	0,15 kg
Mounting	surface-mounted

Dimensions

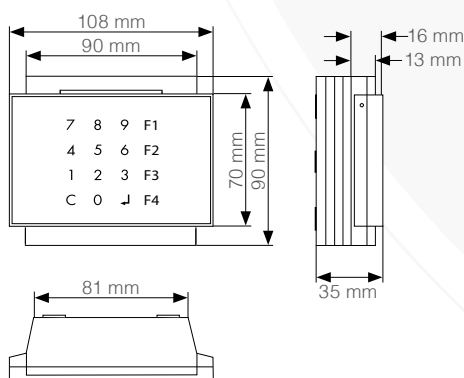

Surface-mounted

Installation example

