

Hardware

Reader for SCU7000/x Universal Control Unit



M615 ACCESS READER WITH PIN CODE FOR OUTDOOR SURFACE-MOUNTED

PIN code access reader with contactless MIFARE/LEGIC reader. The reader has an RS485 interface for connection to an SCU7000/x Control Unit or P7000 Time Terminal.

The reader is part of the Skyline series and is supplied in a silver-coloured casing with a black control panel. The LED light bar displays the authorisation status of the read card.


▼ M615 FOR OUTDOOR

- MH9722 M615, MIFARE Classic / DESFire, surface-mounted
- MH9723 M615, LEGIC prime / advant, surface-mounted

▼ ACCESSORIES AND OPTIONS

- MH8772 Built-in power supply 24 W
- MB5384 Decentralised authorisation assignment per reader

Dimensions

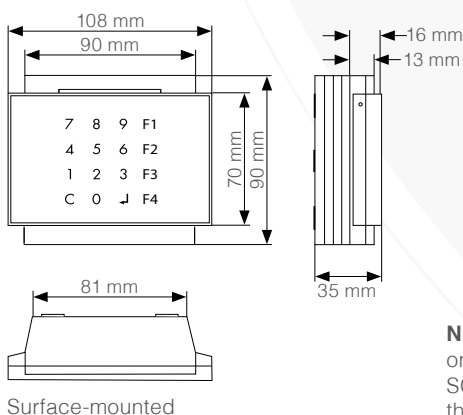


► FEATURES

- Contactless reader technology
- Online operation with SCU7000/x Universal Control Unit or P7000 Time Terminal
- Optical status display via multicolour LED light bar
- Acoustic feedback via signal transmitter
- Power supply:
 - via control unit: only with SCU7000/2/4/8
 - via external power supply: with SCU7000/32 (reader and door strike)
 - or via P7000 Time Terminal
- Keypad with 16 capacitive, blue-illuminated digits and function keys
- Pin code entry
- Arming/disarming of a hazard detection system
- Integrated sabotage contact for connection to universal control unit
- Reading range up to 5 cm

TECHNICAL DATA

Voltage supply	12 V DC by SCU7000/2/4/8 or 12 V DC external (SCU7000/32) 12 V DC by P7000
Max. power input	1.3 W
Max. power consumption	100 mA at 12 V DC
Ambient temperature	-5 to +45 °C
IP protection class	67
Interface	RS485 / 2-wire
Connections	2 optocoupler inputs 2 relay outputs (for door strike)
Dimensions (H x W x D)	90 x 108 x 35 mm
Casing colour	silver (RAL 9006)
Material	plastic
Weight	0,15 kg
Mounting	surface-mounted

Installation example

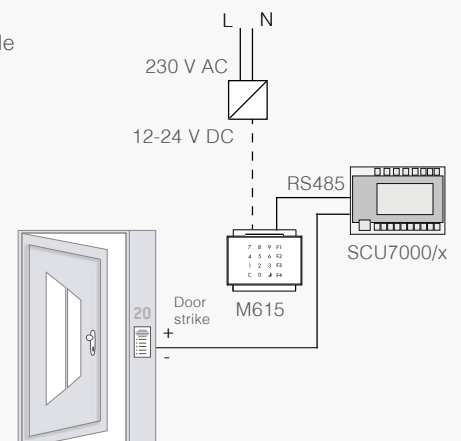

Note: An external power supply is only required when connecting to an SCU7000/32 Control Unit. In this case, the door strike is connected to the reader.