


Hardware

The P700 Time Terminal

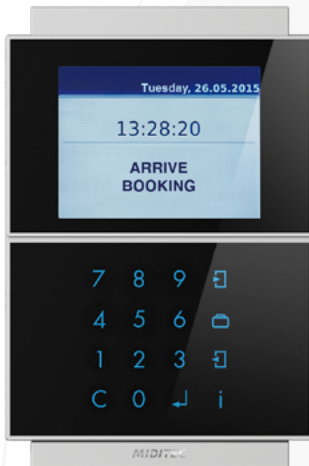

P700 TIME TERMINAL

Terminal for time management with contactless RFID reader technology; 3.5" full-graphics TFT display; connection to server or PC via Ethernet; power supply via PoE; external power supply

FUNCTIONS: Clock-in, clock-out, off-site work, info, status reasons

▼ TERMINAL

MH5311	P700, MIFARE Classic / DESFire, Ethernet
MH5312	P700, LEGIC prime / advant, Ethernet

▼ ACCESSORIES AND OPTIONS

MH5131	PoE Injector IEEE802.3at
--------	--------------------------

► FEATURES

- Online and offline application
- Contactless reader technology
- Storage of up to 2,000 bookings in offline mode
- In offline mode only customer code verification
- Up to 1 info values per employee
- Optical status indication by display
- Acoustic status indication provided by signal generator
- Free definition of keys and display texts
- 12 capacitive, blue-illuminated entry keys, 10 for free configuration on 4 levels each
- 4 capacitive, blue-illuminated function keys for free configuration on 4 levels each
- Data retention for several years
- Online-balance display
- Authorisation check and plausibility check, if the network connection to the MTZ BS is available
- Automatic daylight-saving time adjustment
- 3.5" TFT display
- Display 320 x 240 pixels
- Depending on the reading procedure up to 5 cm
- Power supply only via PoE

TECHNICAL DATA

Voltage supply	12 to 24 VDC external
Max. power input	2.2 W
Max. power consumption	150 mA at 12 VDC
Ambient temperature	-5 - +45 °C
IP protection class	54
Interface	RS422
Dimensions (H x W x D)	161 x 108 x 35 mm
Casing colour	silver (RAL 9006)
Weight	0.25 kg
Mounting	surface-mounted