

Hotel Hardware Modbus IP Controller



MODBUS IP CONTROLLER

Control module for controlling Mitsubishi air conditioning systems via Modbus. The controller has a Modbus interface for connection to the ME-AC-MBS-50 and an Ethernet connection for communication with the Miditec room automation system.


▼ MODBUS IP CONTROLLER

MH9230 Miditec Modbus IP Controller

▼ ACCESSORIES AND OPTIONS

MH9656 Power supply unit 5 V DC / 2,4 A / 12 W

Dimensions

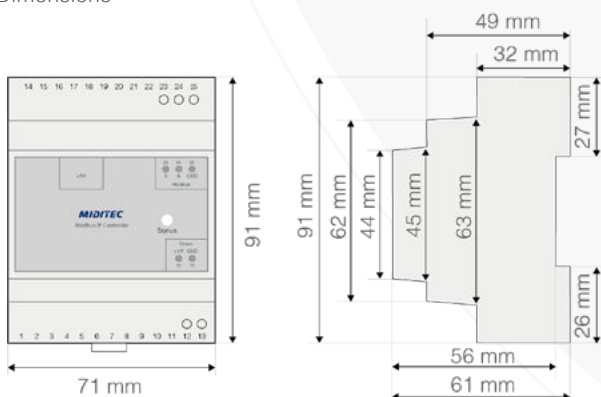

► FEATURES

- Control of Mitsubishi air conditioning systems via Modbus
- Direct control of the interface module ME-AC-MBS-50
- For the integration of Mitsubishi Electric-VRF room air conditioners to the Miditec room automation system
- Power supply via external power supply unit

TECHNICAL DATA

Voltage supply	5 V DC external
Max. power input	4,5 W
Max. power consumption	600 mA
Ambient temperature	10 to +45 °C
IP protection class	20
Dimensions (H x W x D)	91 x 71 x 61 mm
Interfaces	Modbus (RS485), Ethernet
Colour	Light grey (RAL 7035)
Mounting	DIN rail

Installation example

